



# GST II BLACK 20

Parker Global Product

*Designed for compressed air with traces of oil in industrial application. Also suitable in agriculture, construction, and general industry for water, mild chemicals and non aggressive fluids. Not to be used with oil or refined fuel.*

## Hose Construction


**Tube:** Black EPDM, antistatic rubber compound.

**Reinforcement:** Synthetic textile yarns.

**Cover:** Black, smooth EPDM rubber compound resistant to abrasion, heat and ozone

## Temperature Range

-40 °C (-40 °F) to +100 °C (+212 °F)

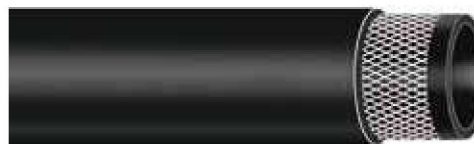






- Nitrosamine free
- Permanent fittings capability
- EPDM compound suitable also for oil mist
- All sizes on stock
- Burst Pressure Value 4:1



## Tolerances

According to UNI EN ISO 1307  
Refer to *Technical Handbook* on page TH34

Part Number				Working Pressure					in Stock
	I.D. (mm)	O.D. (mm)		MPa	psi	bar			
IH709325300/100	6.5	14	2.0	300.0	20	0.16	50	Y	
IH709331300/100	8	16	2.0	300.0	20	0.20	65	Y	
IH709338300/100	9.5	17.5	2.0	300.0	20	0.23	75	Y	
IH709350304/100	13	22	2.0	300.0	20	0.36	105	Y	
IH709363304/100	16	27	2.0	300.0	20	0.52	130	Y	
IH709375304/40	19	29.5	2.0	300.0	20	0.56	150	Y	
IH7093100304/40	25	36.5	2.0	300.0	20	0.75	200	Y	