




## GAMBRINUS RED 10 SM

Recommended for wine, beer, liqueurs, fruit juice and soft drinks in process, package and transfer phase. Ideal either fixed and mobile installation. Not suitable for fatty food. Designed for suction and delivery.

### Hose Construction

- Tube:** White, smooth EPDM rubber compound, non-toxic, odorless and taste-free.  
Manufactured on stainless steel mandrel for the maximum cleanliness and hygienic standards
- Reinforcement:** Synthetic textile fabrics and embedded steel wire helix
- Cover:** Red EPDM rubber compound, non-marking, abrasion and weather-resistant

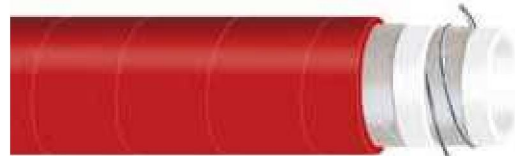

- According to FDA, BfR class 2, DM 21/03/73, EC 1935/2004
- Up to 96 % alcoholic content
- Excellent flexibility, kink resistance, easy handling
- ADI free
- Crimped Stainless Steel Fittings available
- Burst Pressure Value 3:1
- Vacuum: 0.9 bar

### Tolerances

According to RMA steel mandrel  
Refer to Technical Handbook on page TH34

### Temperature Range

-40 °C (-40 °F) to +120 °C (+248 °F)  
sterilization at 110 °C for max 30 min.

Part Number	I.D. (mm)	O.D. (mm)	Working Pressure			Weight kg/m	min. Bend Radius mm	in Stock
			MPa	psi	bar			
IH36242501/40	19	29	1.0	150.0	10	0.67	80	N
IH36242502/40	25	35	1.0	150.0	10	0.80	125	N
IH36242503/40	30	42	1.0	150.0	10	1.11	150	N
IH36242504/40	32	44	1.0	150.0	10	1.23	160	N
IH36242505/40	38	50	1.0	150.0	10	1.38	190	Y
IH36242506/40	40	52	1.0	150.0	10	1.41	200	N
IH36242507/40	45	57	1.0	150.0	10	1.62	225	N
IH36242508/40	51	64	1.0	150.0	10	1.88	255	Y
IH36242509/40	60	73	1.0	150.0	10	2.24	300	N
IH36242510/40	63.5	77	1.0	150.0	10	2.60	320	Y
IH36242511/40	76	89	1.0	150.0	10	3.00	390	Y
IH36242512/40	80	93	1.0	150.0	10	3.17	440	N
IH36242513/20	102	116	1.0	150.0	10	4.60	560	N