



# VINITRESS


For delivery of foodstuff in general industrial purposes and for agriculture applications.

## Hose Construction

Flexible, transparent PVC hose having a textile reinforcement between the walls.

## Temperature Range



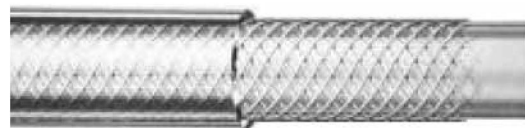


-20 °C (-4 °F) to +100 °C (+212 °F)  
sterilization at 130 °C for short periods



- According to European Directive EC 90/128 Class A, B and C
- Low duty mission profile
- Transparent structure to visually monitor the passage of media

## Tolerances

Refer to Technical Handbook on page TH34

Part Number	 I.D. (mm)	 O.D. (mm)	Working Pressure			 Weight kg/m	 min. Bend Radius mm	in Stock
			 MPa	psi	bar			
IH35033229/100	6	12	2.0	300.0	20	0.10	40	Y
IH35033230/100	8	14	2.0	300.0	20	0.13	50	Y
IH35033223/50	9	15	2.0	300.0	20	0.14	50	Y
IH35033231/100	10	16	2.0	300.0	20	0.15	60	Y
IH35033220/50	13	19	1.2	174.0	12	0.18	80	Y
IH35033222/50	15	21	1.2	174.0	12	0.21	90	Y
IH35033221/50	19	26	1.0	150.0	10	0.30	110	Y
IH35033245/50	25	33	0.8	116.0	8	0.44	150	Y
IH35033241/25	32	42	0.7	101.5	7	0.71	190	N
IH35033246/25	38	48	0.6	87.0	6	0.82	230	N
IH35033240/25	40	50	0.6	87.0	6	0.86	240	N
IH35033242/25	50	64	0.5	72.5	5	1.53	300	N